




HOSIWELL

Worldwide leading cable manufacturer

Audio, Control and Instrument Cable

2 Pair 18 AWG Overall Foil Shielded Paired Cable

Cu/PE/OSCR/PVC

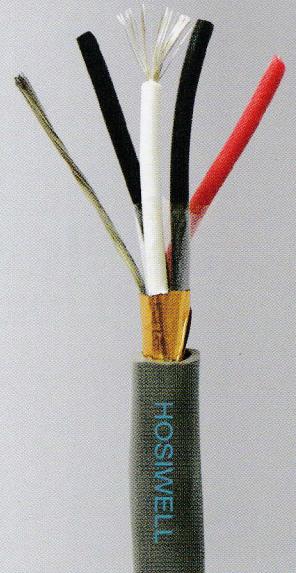


The Multi Conductor Cable from HOSIWELL is suitable to use within Audio, Control and instrumentation purpose. The cable is constructed with PE insulation, 100% Aluminum Foil-Polyester Tape shielded and PVC Outer Jacket.

CABLE CONSTRUCTION

P/N 9218-2P

Conductor	Tinned Copper
Insulation	PE (High Density Polyethylene)
Insulation Color	Black, Clear, Red
Shielding (Coverage 100%)	Aluminum Foil-Polyester Tape
Drain Wire	Tinned Copper
Outer Jacket, Colour	PVC, Grey

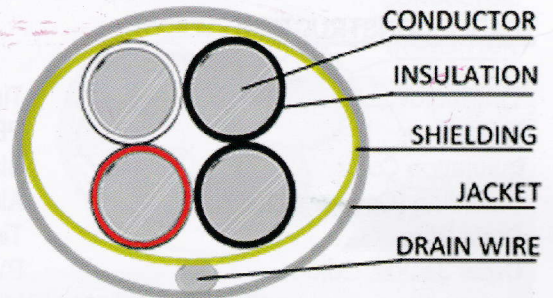

PHYSICAL CHARACTERISTICS

No of Pair	2
Conductor Size	18 AWG, 16 x 30 AWG
Insulation Thickness	0.48 mm
Insulation Diameter	2.16 mm ± 0.05 mm
Drain Wire Size	20 AWG (21/0.18 mm)
Jacket Thickness	1.10 mm
Jacket Diameter	9.60 mm ± 0.20 mm
Max. Recommended Pulling Tension	460 N
Min. Bending Radius Minor Axis	96 mm
Operation Temperature	-10°C to 75°C

COMPLIANCE

- UL Standard 2092
- NEC Article 725, type CM
- UL 1685 Vertical Tray
- UL Approvals
- RoSH



INSULATION COLOUR CODE

Pair 1	Black/Red
Pair 2	Black/Clear



ELECTRICAL CHARACTERISTICS

Nom. Conductor DCR	22.0 Ω/Km
Dielectric Strength between Pairs	1.5 KV/5min
Max. Operating Voltage UL	300 V/min

JACKET CHARACTERISTICS

Weatherproof and sunlight resistance PVC
 Anti-ant and mouse destroy PVC
 Flame retardant: UL type FT4 flame test
 Standard Lengths are : 1000 feet (305 meter)



Marking on cable surface : HOSIWELL CABLE P/N-9218-2P. E135928 - T(UL)TYPE CM 75°C 300V
 Cu/PE/OSCR/PVC 2P 18AWG LL80602 CSA TYPE IIA CMG FT4 75°C 300V 18AWG



APPLICATIONS

For building sound, broadcast, audio control, and instrument use.

